


MULTI SENSING MODULE (MSM)

DESCRIPTION

The multi sensing module (MSM) allows for three additional remote gas sensors to be utilised, expanding the gas sensing module from two to five sensors, thus significantly increasing the area gas detection capability. The multi sensing module is used in conjunction with the gas sensing module and remote gas sensors.

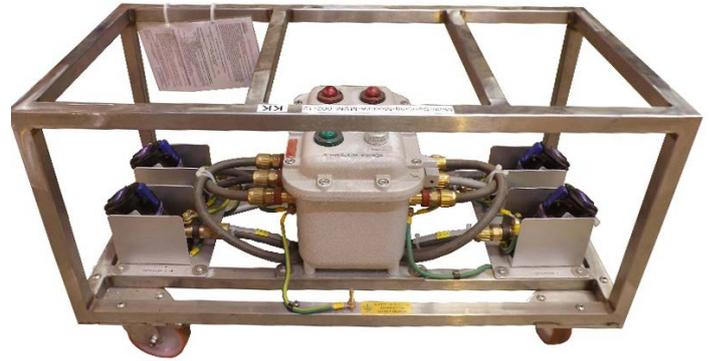

KEY FEATURES

THREE ADDITIONAL GAS DETECTORS

COMPATIBLE EQUIPMENT

RGS – REMOTE GAS SENSOR

GSM – GAS SENSING MODULE

INSULATED DUCTING

TECHNICAL SPECIFICATION

CERTIFICATION & MARKING	ATEX Cert: Baseefa10ATEX0172X Ex II 2G Ex de ia mb IIB T4 (Tamb -20°C to +50°C)
OPERATING TEMPERATURE	-20°C to +50°C
DIMENSIONS (L X W X H) ^	82cm x 40cm x 50cm
WEIGHT ^	38kg
INPUT VOLTAGE	88-264 VAC 50-60Hz
INPUT CURRENT	3A Max (16A Plug)
INPUT CURRENT	20 A (3 Pole)
POWER PLUG TOP OPTIONS	CEAG STAHL APPLETON ATX Others available on request
POWER CONSUMPTION	200W Max
NUMBER OF DETECTORS	4

^ Typical values may vary

SAFEHOUSE is a registered Trade Mark of SAFEHOUSE Habitats (Scotland) Limited registered in the UK, the European Community and other countries around the world. All rights reserved. Any other Trade Marks not owned by SAFEHOUSE Habitats (Scotland) Limited that appear herein are the property of their respective owners, who may, or who may not, be affiliated with, or connected to, SAFEHOUSE Habitats (Scotland) Limited.

© 2019 SAFEHOUSE Habitats (Scotland) Limited.